


RETURN CURB RAMP  
PLAN VIEW

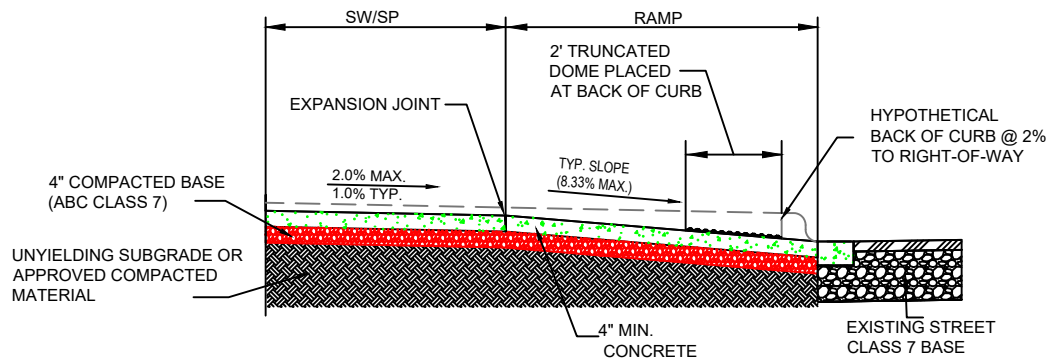

SECTION A-A

NOTES:

1. FULL DEPTH EXPANSION JOINTS (FOUR INCHES) SHALL BE PROVIDED AT THE EDGE OF THE SIDEWALK AND RAMP.
2. CONCRETE TO BE SAWCUT OR PLACE A TOOL JOINT AT THE CENTER OF DRIVE AND SEALED. IF POSSIBLE CONTRACTOR SHALL TRY TO ALIGN THE JOINT AT THE CENTER OF THE DRIVE WITH THE A JOINT IN THE ADJACENT SIDEWALK.
3. ALL CONCRETE DRIVEWAYS AND SIDEWALKS SHALL BE CONSTRUCTED OF A PORTLAND CEMENT CONCRETE MIXTURE WHICH WILL PRODUCE A CONCRETE OF A COMPRESSIVE STRENGTH OF 3500 P.S.I. AFTER 28 DAYS SET UNDER STANDARD LABORATORY METHODS.
4. ALL SIDEWALKS REQUIRE A CONCRETE CURING COMPOUND, SUCH AS SEALTIGHT 1600-WHITE MANUFACTURED BY W.R. MEADOWS, OR AN APPROVED EQUAL
5. ALL SIDEWALKS AND DRIVEWAY APPROACHES SHALL BE CONSTRUCTED WITH A BROOM FINISH.
6. **ALL SIDEWALKS AND CURB CUTS FOR HANDICAP RAMPS REQUIRE AN INSPECTION PRIOR TO CONCRETE PLACEMENT.**
7. IF THE EXISTING GUTTER PAN IS DAMAGED OR DAMAGED DURING CURB REMOVAL, REFER TO DETAIL HR2 AND REMOVE FROM JOINT TO JOINT WITHIN THE LIMITS OF SAW CUT.



DATE:	REVISION:	BY:	TITLE:	DRAWN:
6/13/2023	DETAIL CREATED	BW	HANDICAP RAMP	JUNE 2023
			DESCRIPTION:	APPROVED:
			HANDICAP RAMP WITH RETURN CURB	JUNE 2023
				SHEET:
				HR-2